

Description

The DigiFlex® Performance™ (DP) Series digital servo drives are designed to drive brushed and brushless servomotors. These fully digital drives operate in torque, velocity, or position mode and employ Space Vector Modulation (SVM), which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. The drive can be configured for a variety of external command signals. Commands can also be configured using the drive's built-in Motion Engine, an internal motion controller used with distributed motion applications. In addition to motor control, these drives feature dedicated and programmable digital and analog inputs and outputs to enhance interfacing with external controllers and devices.

Network communication is accomplished using either RS-485/232 or Modbus RTU. This DP Series drive features a single serial interface used for drive commissioning via DriveWare® 7, available for download at www.a-m-c.com.

The DPR Hardware Installation Manual is available for download from www.a-m-c.com. All drive and motor parameters are stored in non-volatile memory.



Features

- ▲ Four Quadrant Regenerative Operation
- ▲ Space Vector Modulation (SVM) Technology
- ▲ Fully Digital State-of-the-art Design
- ▲ Programmable Gain Settings
- ▲ Fully Configurable Current, Voltage, Velocity and Position Limits
- ▲ PIDF Velocity Loop
- ▲ PID + FF Position Loop
- ▲ Compact Size, High Power Density
- ▲ 16-bit Analog to Digital Hardware
- ▲ Built-in brake/shunt regulator
- ▲ On-the-Fly Mode Switching
- ▲ On-the-Fly Gain Set Switching
- ▲ Dedicated Safe Torque Off (STO) Inputs

MODES OF OPERATION

- Current
- Position
- Velocity
- Hall Velocity

COMMAND SOURCE

- PWM and Direction
- Encoder Following
- Over the Network
- ±10 V Analog
- Sequencing
- Indexing
- Jogging

FEEDBACK SUPPORTED

- Halls
- Incremental Encoder
- ±10 VDC Position
- Auxiliary Incremental Encoder
- Tachometer (±10 VDC)


INPUTS/OUTPUTS

- 3 High Speed Captures
- 4 Programmable Analog Inputs (16-bit/12-bit Resolution)
- 1 Programmable Analog Output (10-bit Resolution)
- 3 Programmable Digital Inputs (Differential)
- 7 Programmable Digital Inputs (Single-Ended)
- 4 Programmable Digital Outputs (Single-Ended)

COMPLIANCES & AGENCY APPROVALS

- UL
- cUL
- CE Class A (LVD)
- CE Class A (EMC)
- RoHS II
- TÜV Rheinland® (STO)

BLOCK DIAGRAM

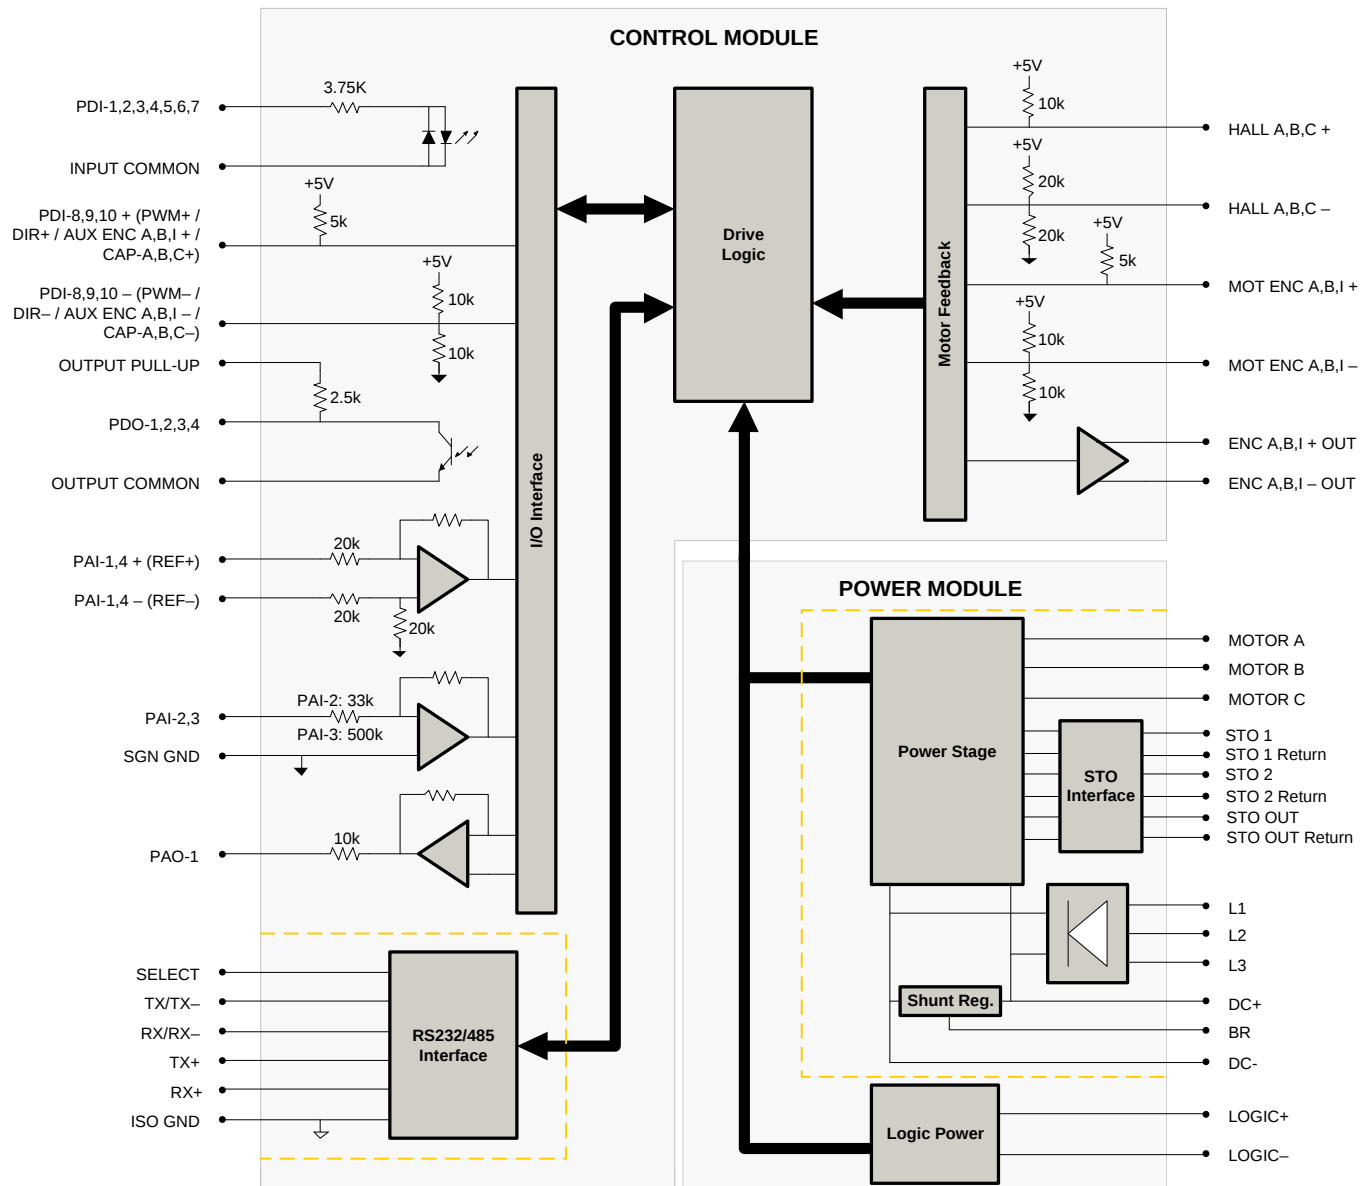

Information on Approvals and Compliances



US and Canadian safety compliance with UL 508c, the industrial standard for power conversion electronics. UL registered under file number E140173. Note that machine components compliant with UL are considered UL registered as opposed to UL listed as would be the case for commercial products.



Compliant with European EMC Directive 2004/108/EC on Electromagnetic Compatibility (specifically EN 61000-6-4:2007 for Emissions, Class A and EN 61000-6-2:2005 for Immunity, Performance Criteria A). LVD requirements of Directive 2006/95/EC (specifically, EN 60204-1:2004, a Low Voltage Directive to protect users from electrical shock).



The RoHS II Directive 2011/65/EU restricts the use of certain substances including lead, mercury, cadmium, hexavalent chromium and halogenated flame retardants PBB and PBDE in electronic equipment.



Functional Safety STO is TÜV Rheinland® certified and meets requirements of the following standards:

- EN ISO 13849-1 Category 4 / PL e
- EN IEC 61800-5-2 STO (SIL 3)
- EN62061 SIL CL3
- IEC 61508 SIL 3

SPECIFICATIONS

Power Specifications		
Description	Units	Value
Rated Voltage	VAC (VDC)	240 (339)
AC Supply Voltage Range	VAC	100 - 240
AC Supply Minimum	VAC	90
AC Supply Maximum	VAC	264
AC Input Phases ¹	-	3
AC Supply Frequency	Hz	50 - 60
DC Supply Voltage Range ²	VDC	127 - 373
DC Bus Over Voltage Limit	VDC	394
DC Bus Under Voltage Limit	VDC	55
Logic Supply Voltage	VDC	20 - 30 (@ 850 mA)
Safe Torque Off Voltage	VDC	24 (±6)
Maximum Peak Output Current ³	A (Arms)	40 (28.3)
Maximum Continuous Output Current ⁴	A (Arms)	20 (20)
Max. Continuous Output Power @ Rated Voltage ⁵	W	6441
Max. Continuous Power Dissipation @ Rated Voltage	W	339
Internal Bus Capacitance	µF	660
External Shunt Resistor Minimum Resistance	Ω	25
Minimum Load Inductance (Line-To-Line) ⁶	µH	600
Switching Frequency	kHz	20
Maximum Output PWM Duty Cycle	%	100
Low Voltage Supply Outputs	-	+5 VDC (250 mA)
Control Specifications		
Description	Units	Value
Communication Interfaces	-	RS-485/232 / Modbus RTU
Command Sources	-	±10 V Analog, Encoder Following, Over the Network, PWM and Direction, Sequencing, Indexing, Jogging
Feedback Supported	-	±10 VDC Position, Auxiliary Incremental Encoder, Halls, Incremental Encoder, Tachometer (±10 VDC)
Commutation Methods	-	Sinusoidal, Trapezoidal
Modes of Operation	-	Current, Hall Velocity, Position, Velocity
Motors Supported	-	Closed Loop Vector, Single Phase (Brushed, Voice Coil, Inductive Load), Three Phase (Brushless)
Hardware Protection	-	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage
Programmable Digital Inputs/Outputs (PDIs/PDOs)	-	10/4
Programmable Analog Inputs/Outputs (PAIs/PAOs)	-	4/1
Primary I/O Logic Level	-	24 VDC
Current Loop Sample Time	µs	50
Velocity Loop Sample Time	µs	100
Position Loop Sample Time	µs	100
Maximum Encoder Frequency	MHz	20 (5 pre-quadrature)
Internal Shunt Regulator	-	Yes
Internal Shunt Resistor	-	No
Mechanical Specifications		
Description	Units	Value
Agency Approvals	-	CE Class A (EMC), CE Class A (LVD), cUL, RoHS II, TÜV Rheinland® (STO), UL
Size (H x W x D)	mm (in)	177.50 x 133.53 x 49.20 (6.99 x 5.26 x 1.94)
Weight	g (oz)	1720 (60.7)
Heatsink (Base) Temperature Range ⁷	°C (°F)	0 - 75 (32 - 167)
Storage Temperature Range	°C (°F)	-40 - 85 (-40 - 185)
Form Factor	-	Panel Mount
Cooling System	-	Natural Convection
+24V LOGIC Connector	-	2-port, 3.5 mm spaced insert connector
AUX ENCODER Connector	-	15-pin, high-density, male D-sub
COMM Connector	-	9-pin, female D-sub
FEEDBACK Connector	-	15-pin, high-density, female D-sub
I/O Connector	-	26-pin, high-density, female D-sub
AC POWER Connector	-	4-port, 5.0 mm spaced, push-in front spring connection header
DC POWER Connector	-	5-port, 5.0 mm spaced, push-in front spring connection header
MOTOR POWER Connector	-	4-port, 5.0 mm spaced, push-in front spring connection header
STO Connector	-	8-port, 2.0 mm spaced, enclosed, friction lock header

Notes

- Can operate on single-phase VAC if peak/cont. current ratings are reduced by at least 30%.
- DC Supply operation will reduce peak/cont. current ratings by at least 30%.
- Capable of supplying drive rated peak current for 2 seconds with 10 second foldback to continuous value. Longer times are possible with lower current limits.
- Continuous A_{rms} value attainable when RMS Charge-Based Limiting is used.
- $P = (DC \text{ Rated Voltage}) * (Cont. RMS Current) * 0.95$.
- Lower inductance is acceptable for bus voltages well below maximum. Use external inductance to meet requirements.
- Additional cooling and/or heatsink may be required to achieve rated performance.

PIN FUNCTIONS

+ 24V LOGIC - Logic Power Connector			
Pin	Name	Description / Notes	I/O
1	LOGIC GND	Logic Supply Ground	GND
2	LOGIC PWR	Logic Supply Input	I

AUX ENCODER - Auxiliary Feedback Connector			
Pin	Name	Description / Notes	I/O
1	RESERVED	Reserved	-
2	RESERVED	Reserved	-
3	RESERVED	Reserved	-
4	PDI-8 + (PWM+ / AUX ENC A+ / CAP-B+)	Programmable Digital Input or PWM or Auxiliary Encoder or High Speed Capture (For Single-Ended Signals Leave Negative Terminal Open)	I
5	PDI-8 - (PWM- / AUX ENC A- / CAP-B-)		I
6	PDI-9 + (DIR+ / AUX ENC B+ / CAP-C+)	Programmable Digital Input or Direction Input or Auxiliary Encoder or High Speed Capture (For Single-Ended Signals Leave Negative Terminal Open)	I
7	PDI-9 - (DIR- / AUX ENC B- / CAP-C-)		I
8	PDI-10 + (AUX ENC I+ / CAP-A+)	Programmable Digital Input or Auxiliary Encoder or High Speed Capture (For Single-Ended Signals Leave Negative Terminal Open)	I
9	PDI-10 - (AUX ENC I- / CAP-A-)		I
10	SGN GND	Signal Ground	SGND
11	SGN GND	Signal Ground	SGND
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	O
14	PAI-4 +	Differential Programmable Analog Input (12-bit Resolution)	I
15	PAI-4 -		I

COMM - RS232/RS485 Communication Connector			
Pin	Name	Description / Notes	I/O
1	SELECT	RS232/485 selection. Pull to ground (CN1-5) for RS485.	I
2	RS232 TX / RS485 TX-	Transmit Line (RS-232 or RS-485)	O
3	RS232 RX / RS485 RX-	Receive Line (RS-232 or RS-485)	I
4	RESERVED	Reserved	-
5	ISO GND	Isolated Signal Ground	IGND
6	RS485 TX+	Transmit Line (RS-485)	O
7	RESERVED	Reserved	-
8	RS485 RX+	Receive Line (RS-485)	I
9	RESERVED	Reserved	-

FEEDBACK - Feedback Connector			
Pin	Name	Description / Notes	I/O
1	HALL A+	Commutation Sensor Inputs	I
2	HALL B+		I
3	HALL C+		I
4	MOT ENC A+	Differential Encoder A Channel Input (For Single Ended Signals Use Only The Positive Input)	I
5	MOT ENC A-		I
6	MOT ENC B+	Differential Encoder B Channel Input (For Single Ended Signals Use Only The Positive Input)	I
7	MOT ENC B-		I
8	MOT ENC I+	Differential Encoder Index Input (For Single Ended Signals Use Only The Positive Input)	I
9	MOT ENC I-		I
10	HALL A-	Commutation Sensor Input (For Differential Signals Only)	I
11	HALL B-	Commutation Sensor Input (For Differential Signals Only)	I
12	SGN GND	Signal Ground	SGND
13	+5V OUT	+5V Encoder Supply Output (Short Circuit Protected)	O
14	PAI-3	Programmable Analog Input (12-bit Resolution)	I
15	HALL C-	Commutation Sensor Input (For Differential Signals Only)	I

I/O - Signal Connector			
Pin	Name	Description / Notes	I/O
1	PDO-1	Isolated Programmable Digital Output	O
2	OUTPUT COMMON	Digital Output Common	OGND
3	PDO-2	Isolated Programmable Digital Output	O
4	PAI-1 + (REF+)	Differential Programmable Analog Input or Reference Signal Input (16-bit Resolution)	I
5	PAI-1 - (REF-)		I
6	PAI-2	Programmable Analog Input (12-bit Resolution)	I
7	PAO-1	Programmable Analog Output (10-bit Resolution)	O
8	OUTPUT PULL-UP	Digital Output Pull-Up For User Outputs	I
9	PDI-5	Isolated Programmable Digital Input	I
10	PDO-3	Isolated Programmable Digital Output	O
11	PDI-1	Isolated Programmable Digital Input	I
12	PDI-2	Isolated Programmable Digital Input	I
13	PDI-3	Isolated Programmable Digital Input	I
14	PDO-4	Isolated Programmable Digital Output	O
15	INPUT COMMON	Digital Input Common (Can Be Used To Pull-Up Digital Inputs)	IGND
16	SGN GND	Signal Ground	SGND
17	PDI-4	Isolated Programmable Digital Input	I
18	PDI-6	Isolated Programmable Digital Input	I
19	PDI-7	Isolated Programmable Digital Input	I
20	ENC A+ OUT	Buffered Encoder Channel A Output	O
21	ENC A- OUT		O
22	ENC B+ OUT	Buffered Encoder Channel B Output	O
23	ENC B- OUT		O
24	ENC I+ OUT	Buffered Encoder Index Output	O
25	ENC I- OUT		O
26	SGN GND	Signal Ground	SGND

Motor Power Connector			
Pin	Name	Description / Notes	I/O
1	CHASSIS	Chassis Ground	CGND
2	MOTOR A	Motor Phase A	O
3	MOTOR B	Motor Phase B	O
4	MOTOR C	Motor Phase C	O

AC Power Connector			
Pin	Name	Description / Notes	I/O
1	L1	AC Supply Input (Three Phase). External 20 A time delay fuses are recommended in series with the AC input lines.	I
2	L2		I
3	L3		I
4	CHASSIS	Chassis Ground	CGND

DC Power Connector			
Pin	Name	Description / Notes	I/O
1	DC-	Power Ground	PGND
2	NC	No Connect	-
3	DC+	DC Power Input	I
4	DC+	External Shunt Resistor Connection. Connect resistor between DC+ and BR.	-
5	BR		-

STO – Safe Torque Off Connector			
Pin	Name	Description / Notes	I/O
1	STO OUTPUT	Safe Torque Off Output	O
2	RESERVED	Reserved	-
3	STO-1 RETURN	Safe Torque Off 1 Return	STORET1
4	STO-1	Safe Torque Off – Input 1	I
5	STO-2 RETURN	Safe Torque Off 2 Return	STORET2
6	STO-2	Safe Torque Off – Input 2	I
7	RESERVED	Reserved	-
8	STO OUT RETURN	Safe Torque Off Output Return	STORETO

HARDWARE SETTINGS

Switch Functions

Switch	Description	Setting	
		On	Off
1	Bit 0 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
2	Bit 1 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
3	Bit 2 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
4	Bit 3 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
5	Bit 4 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
6	Bit 5 of binary RS-485 drive address. Does not affect RS-232 settings.	1	0
7	Bit 0 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0
8	Bit 1 of drive RS-485 baud rate setting. Does not affect RS-232 settings.	1	0

Additional Details

The drive can be configured to use the address and/or bit rate stored in non-volatile memory by setting the address and/or bit rate value to 0. Use the table below to map actual bit rates to a bit rate setting.

Baud Rate (kbps)	Value For Bit Rate Setting
Load from non-volatile memory	0
9.6	1
38.4	2
115.2	3


Safe Torque Off (STO) Inputs

The Safe Torque Off (STO) Inputs are dedicated +24VDC max sinking single-ended inputs. A dedicated STO Disable Key connector is included and should be installed for applications where STO is not required.

MECHANICAL INFORMATION


+24V LOGIC - Logic Power Connector

Connector Information		2-port, 3.5 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: P/N 1840366
	Included with Drive	Yes




AUX ENCODER - Auxiliary Feedback Connector

Connector Information		15-pin, high-density, male D-sub
Mating Connector	Details	TYCO: Plug P/N 1658681-1; Housing P/N 5748677-1; Terminals P/N 1658686-2 (loose) or 1658686-1 (strip)
	Included with Drive	No

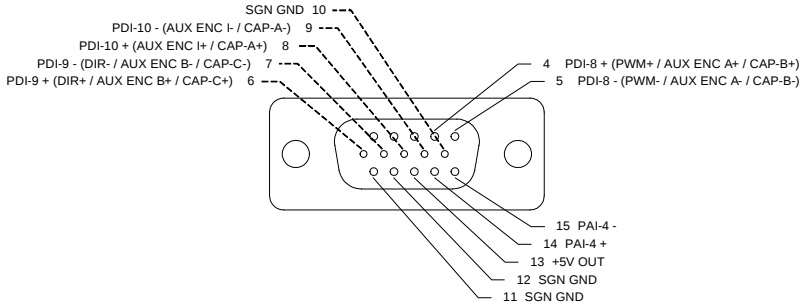


COMM - RS232/RS485 Communication Connector

Connector Information		9-pin, female D-sub
Mating Connector	Details	TYCO: Plug P/N 205204-4; Housing P/N 5748677-1; Terminals P/N 1658540-5 (loose) or 1658540-4 (strip)
	Included with Drive	No




FEEDBACK - Feedback Connector


Connector Information		15-pin, high-density, female D-sub
Mating Connector	Details	TYCO: Plug P/N 748364-1; Housing P/N 5748677-1; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No

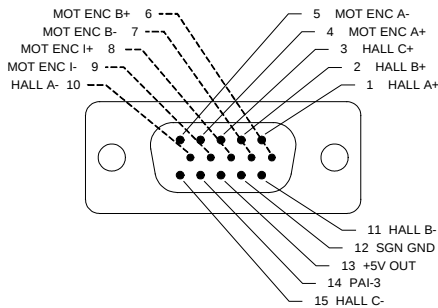
I/O - Signal Connector

Connector Information		26-pin, high-density, female D-sub
Mating Connector	Details	TYCO: Plug P/N 1658671-1; Housing P/N 5748677-2; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No

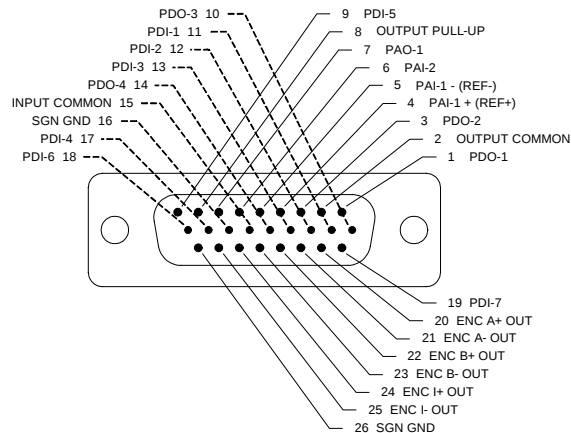

Motor Power Connector

Connector Information		4-port, 5.0 mm spaced, push-in front spring connection header
Mating Connector	Details	Push-in direct plug-in method for solid or stranded conductors with or without ferrules
	Included with Drive	No

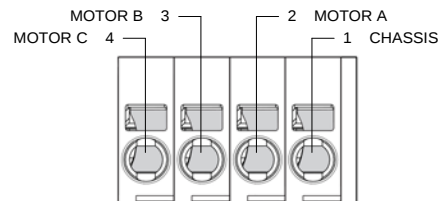


DC Power Connector

Connector Information		5-port, 5.0 mm spaced, push-in front spring connection header
Mating Connector	Details	Push-in direct plug-in method for solid or stranded conductors with or without ferrules
	Included with Drive	No

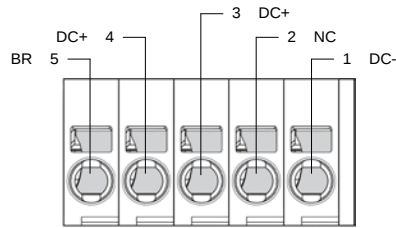


AC Power Connector

Connector Information		4-port, 5.0 mm spaced, push-in front spring connection header
Mating Connector	Details	Push-in direct plug-in method for solid or stranded conductors with or without ferrules
	Included with Drive	No

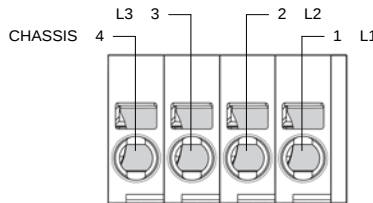


STO – Safe Torque Off Connector

Connector Information		8-port, 2.00 mm spaced, enclosed, friction lock header
Mating Connector	Details	Molex: P/N 51110-0860 (housing); 50394-8051 (pins)
	Included with Drive	Yes

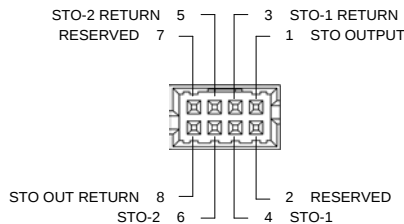


MOUNTING DIMENSIONS

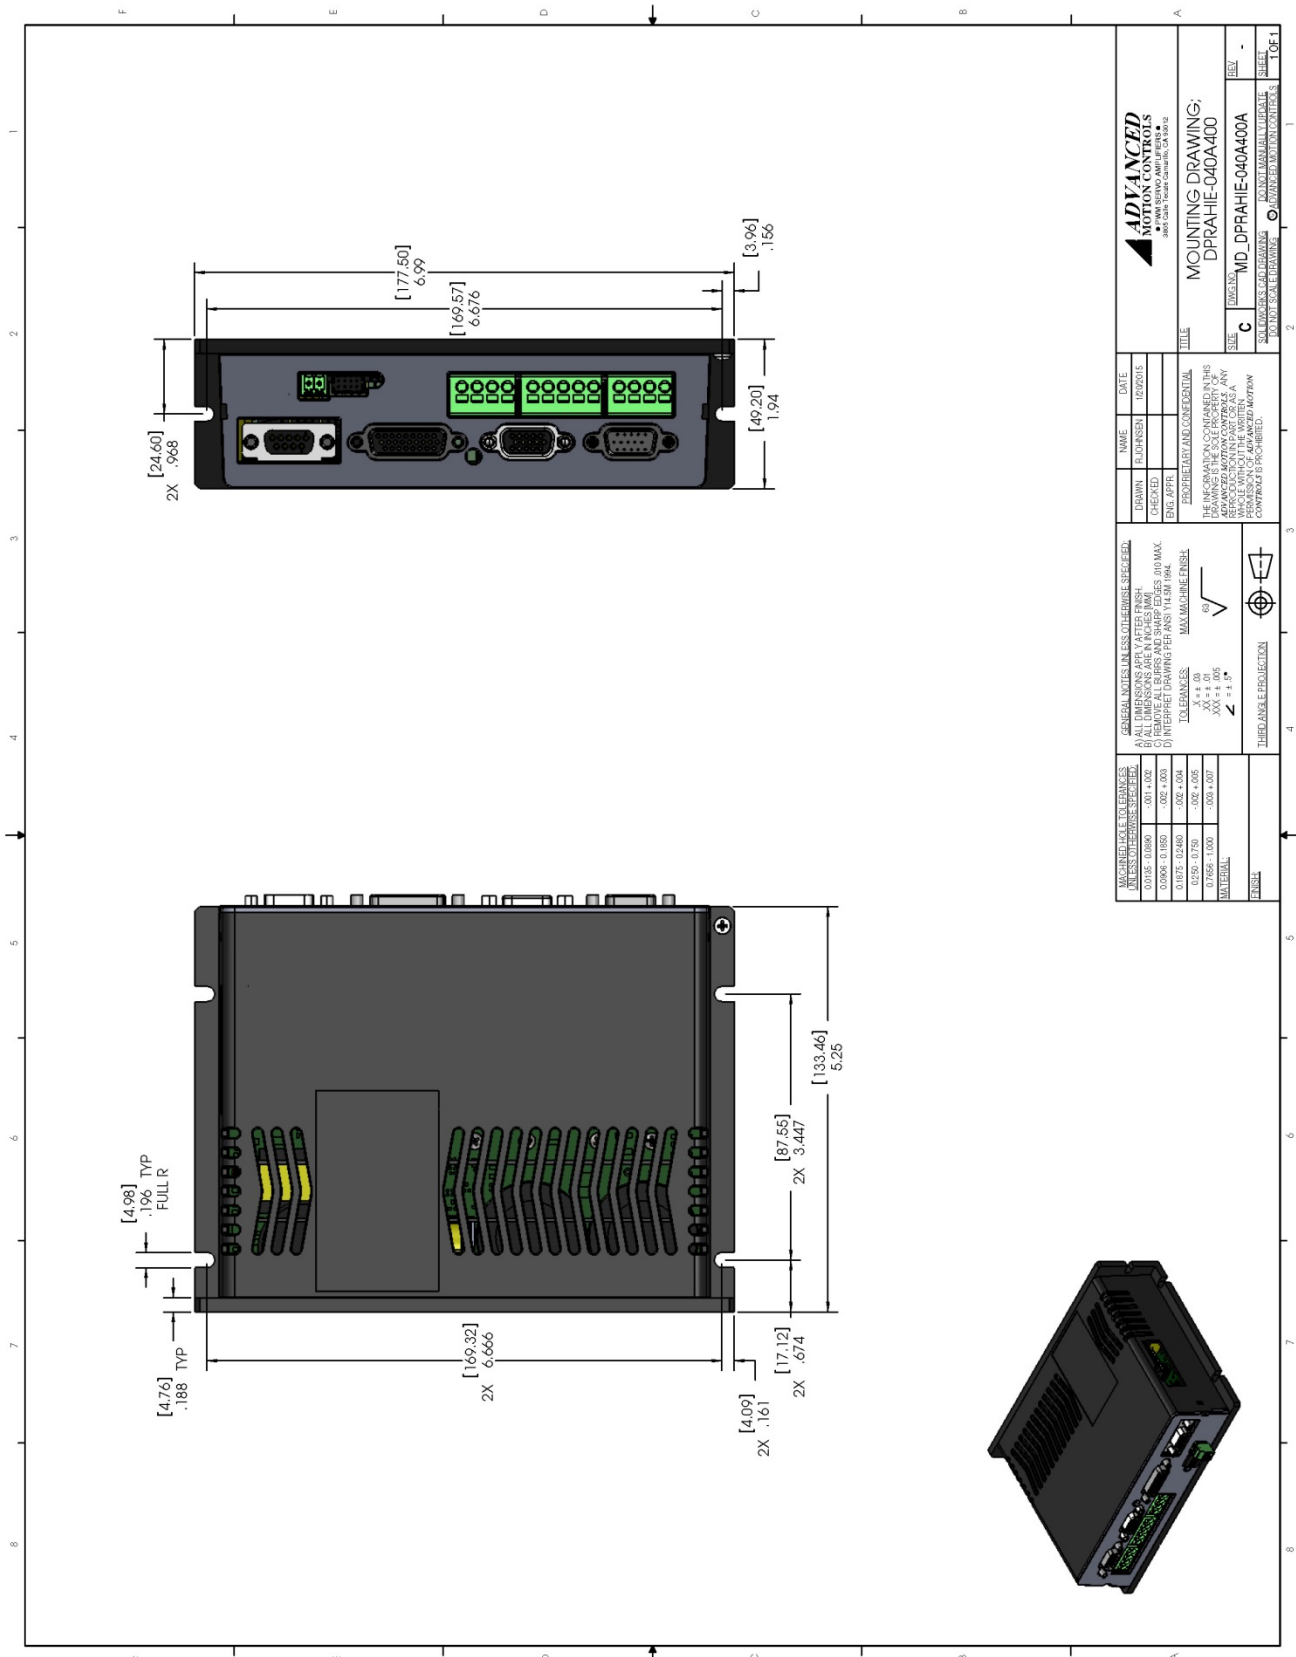

GENERAL INFORMATION AND MATERIAL SPECIFICATIONS		NAME		DATE	
A) ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		DRAWN		10/20/15	
B) ALL DIMENSIONS APPLY TO OTHER FINISHES		CHECKED			
C) ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED		END APPR			
D) INTERPRET DRAWING PER ANSI Y14.1M 1994					
E) INTERPRET DRAWING PER ANSI Y14.1M 1994					
F) INTERPRET DRAWING PER ANSI Y14.1M 1994					
G) INTERPRET DRAWING PER ANSI Y14.1M 1994					
H) INTERPRET DRAWING PER ANSI Y14.1M 1994					
I) INTERPRET DRAWING PER ANSI Y14.1M 1994					
J) INTERPRET DRAWING PER ANSI Y14.1M 1994					
K) INTERPRET DRAWING PER ANSI Y14.1M 1994					
L) INTERPRET DRAWING PER ANSI Y14.1M 1994					
M) INTERPRET DRAWING PER ANSI Y14.1M 1994					
N) INTERPRET DRAWING PER ANSI Y14.1M 1994					
O) INTERPRET DRAWING PER ANSI Y14.1M 1994					
P) INTERPRET DRAWING PER ANSI Y14.1M 1994					
Q) INTERPRET DRAWING PER ANSI Y14.1M 1994					
R) INTERPRET DRAWING PER ANSI Y14.1M 1994					
S) INTERPRET DRAWING PER ANSI Y14.1M 1994					
T) INTERPRET DRAWING PER ANSI Y14.1M 1994					
U) INTERPRET DRAWING PER ANSI Y14.1M 1994					
V) INTERPRET DRAWING PER ANSI Y14.1M 1994					
W) INTERPRET DRAWING PER ANSI Y14.1M 1994					
X) INTERPRET DRAWING PER ANSI Y14.1M 1994					
Y) INTERPRET DRAWING PER ANSI Y14.1M 1994					
Z) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
AZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
BZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
CZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
DZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
ED) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
ER) INTERPRET DRAWING PER ANSI Y14.1M 1994					
ES) INTERPRET DRAWING PER ANSI Y14.1M 1994					
ET) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
EZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
FZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
GZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
HZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
ID) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
II) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
IZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
JZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KC) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KD) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KE) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KF) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KG) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KH) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KI) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KJ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KK) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KL) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KM) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KN) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KO) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KP) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KQ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KR) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KS) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KT) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KU) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KV) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KW) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KX) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KY) INTERPRET DRAWING PER ANSI Y14.1M 1994					
KZ) INTERPRET DRAWING PER ANSI Y14.1M 1994					
LA) INTERPRET DRAWING PER ANSI Y14.1M 1994					
LB) INTERPRET DRAWING PER ANSI Y14.1M 1994					
LC) INTERPRET DRAWING PER ANSI Y14.1M 1994					

Example: **D P R A N I E - 0 4 0 A 4 0 0 -**

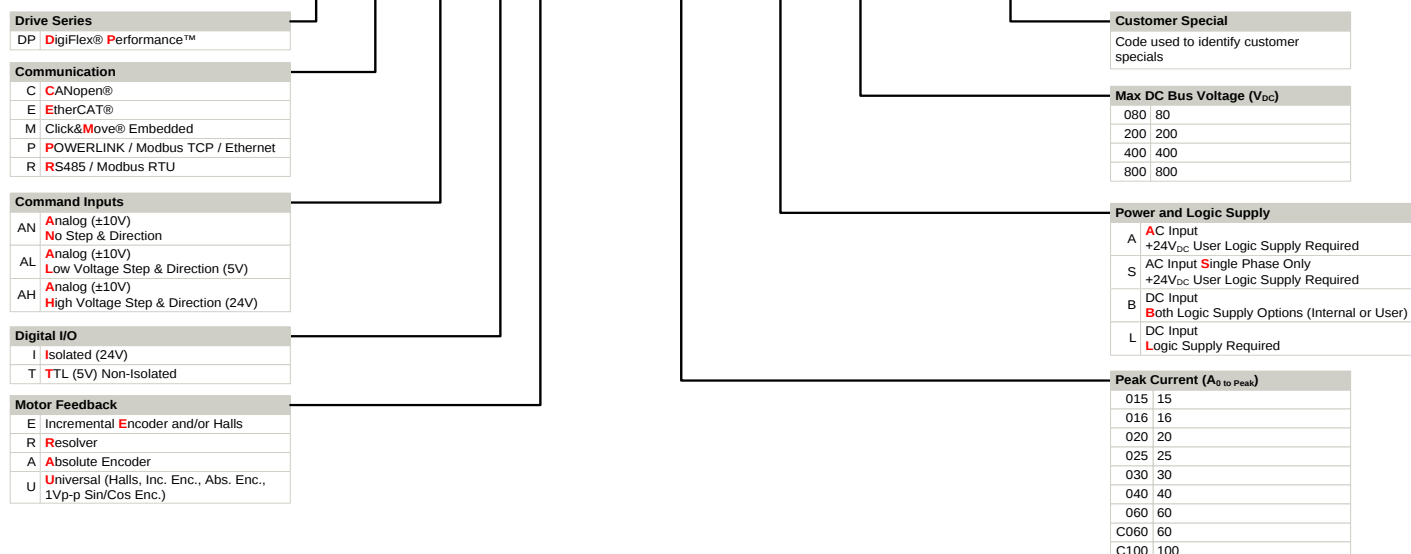

ADVANCED Motion Controls also has the capability to promptly develop and deliver specified products for OEMs with volume requests. Our Applications and Engineering Departments will work closely with your design team through all stages of development in order to provide the best servo drive solution for your system. Equipped with on-site manufacturing for quick-turn customs capabilities, **ADVANCED** Motion Controls utilizes our years of engineering and manufacturing expertise to decrease your costs and time-to-market while increasing system quality and reliability. Feel free to contact Applications Engineering for further information and details.

Examples of Customized Products	
▲ Optimized Footprint	▲ Tailored Project File
▲ Private Label Software	▲ Silkscreen Branding
▲ OEM Specified Connectors	▲ Optimized Base Plate
▲ No Outer Case	▲ Increased Current Limits
▲ Increased Current Resolution	▲ Increased Voltage Range
▲ Increased Temperature Range	▲ Conformal Coating
▲ Custom Control Interface	▲ Multi-Axis Configurations
▲ Integrated System I/O	▲ Reduced Profile Size and Weight

ADVANCED Motion Controls offers a variety of accessories designed to facilitate drive integration into a servo system. Visit www.a-m-c.com to see which accessories will assist with your application design and implementation.



Page 11 of 11